
QuickSpecs

HP Integrity BL870c i2 Server Blade

Overview

HP Integrity BL870c i2 Server Blade

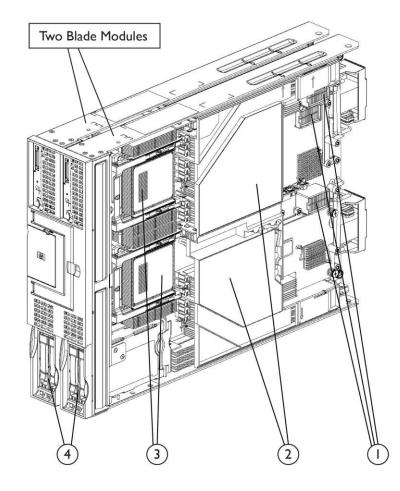

1. 6 x PCIe mezzanine slots (per BL870c i2)

2. 48 x DDR3 DIMM slots (per BL870c i2)

- 3. 4 x Intel[®] Itanium[®] processor 9300 series sockets (per BL870c i2)
 4. 4 x SEE SAS UDDs, bot swap have (per BL970c i2)
- 4. 4 x SFF SAS HDDs, hot-swap bays (per BL870c i2)

What's New

- Support for HP-UX Virtual Partitions (vPars) v6.0
- Support for HP 300GB 6G SAS 15K SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive
- Support for HP NC553m Dual Port 10Gb FlexFabric Adapter (Ethernet and FCoE)
- Support for HP Smart Array P711m 6G SAS Controller

At A Glance

This document covers the HP Integrity BL870c i2 server blade only. For more information on HP BladeSystem c-Class Enclosure and HP BladeSystem c-Class Interconnect and Mezzanine Components, please see the following:

- HP BladeSystem c3000 Enclosure QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12790_div/12790_div.html
- HP BladeSystem c7000 Enclosure QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12810_div/12810_div.html
- HP BladeSystem c-Class Interconnect and Mezzanine Components:



QuickSpecs

HP Integrity BL870c i2 Server Blade

Overview

http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html

The HP Integrity BL870c i2 delivers the performance, reliability, and availability on 64-bit operating systems (HP-UX 11i v3, Microsoft Windows[®] Server 2008 for Itanium-based systems and OpenVMS v8.4) for the ultimate in scalability and flexibility in deployment: To further enrich your cost-efficient, consolidated Integrity blade infrastructure, HP Insight Dynamics - VSE for HP Integrity servers can help with solution components such as HP-UX Virtual Partitions (vPars) v6.0, HP Integrity Virtual Machines, HP Capacity Advisor and Virtualization Manager, HP Global Workload Manager and HP-UX Workload Manager, HP Insight Dynamics - VSE for Itanium-based Systems - VSE Reference Architectures, and HP Serviceguard.

HP Integrity BL870c i2 server blade includes:

- Processor:
 - Up to four Intel[®] Itanium[®] 9300 Series processors
- Memory:
 - Up to 768 GB of memory. Supporting (48) DDR3 registered memory modules (R-DIMMs)
- Storage Controller:
 - Two (2) Embedded HP p410i SAS RAID Controllers integrated on system board
 - RAID 1, RAID 0, and HBA mode configuration options
- Internal Drive Support:
 - Supports up to (4) four small form factor (SFF) SAS hot plug hard drives
- Network Controller:
 - Eight (8) NIC ports via four (4) embeddedNC532i Dual Port Flex-10 Multifunction Server Adapters
 NOTE: Flex-10 capability requires OS drivers and the use of an HP Virtual Connect Flex-10 10GbE Ethernet module. Learn more at: www.hp.com/go/virtualconnect
 NOTE: BL8x0c i2 server blades require Virtual Connect 3.00 or later when used in Virtual Connect configurations
 - **NOTE:** Each port is autosensing 1Gb/10Gb, and can interoperate with 1Gb HP BladeSystem c-Class interconnect components
 - Plus one (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management
- Mezzanine Support:
 - Six (6) additional I/O expansion slots via mezzanine cards.
 - Supports up to (6) mezzanine cards
 - HP NC553m Dual Port 10Gb FlexFabric Adapter
 - HP NC551m Dual Port 10Gb FlexFabric Adapter
 - HP NC552m 10Gb 2-port Flex-10 Ethernet Adapter
 - HP NC532m Dual Port Flex-10 10GbE BL-c Adapter
 - HP Emulex LPe1205 8Gb FC BL-c HBA (2-port 8Gb Emulex FC HBA)
 - HP QMH 2562 8Gb FC BL-c HBA (2-port 8Gb QLogic FC HBA)
 - HP Smart Array P711m/1G FBWC Controller
 - HP Smart Array P700m/512 Controller
 - HP 4X QDR IB CX-2 Dual Port Mezz HCA for HP BladeSystem c-Class
 - HP NC364m 4-port 1GbE BLc Adapter
 - HP NC360m 2-port 1GbE BLc Adapter
- USB Support:
 - Two (2) Internal USB ports on the BL870c i2
 - $\circ~$ Two (2) External USB ports on the BL870c i2 via SUV cable
- Management:
 - HP Integrity Server Blades Management Software
 - Integrity Integrated Lights-Out 3 (iLO 3) management processor
 - HP Insight Control
 - HP System Management Homepage
 - HP-UX 11i Management Software for Integrity Blades, www.hp.com/go/hpuxblades
 - HP Ignite-UX
 - HP-UX Software Assistant (SWA)
 - HP Dynamic Root Disk (DRD)



QuickSpecs

HP Integrity BL870c i2 Server Blade

Overview

- HP BladeSystem Infrastructure Management Software:
 - HP BladeSystem c-Class Onboard Administrator
 - HP BladeSystem c-Class Virtual Connect
- Enterprise Management Software
 - Data Protector Software
 - GlancePlus Pak
 - Performance Manager and Agent
- Virtualization with HP Insight Dynamics VSE for HP Integrity servers , www.hp.com/go/insightdynamics/integrity
 Advanced Infrastructure Management
 - HP Capacity Advisor
 - HP Virtualization Manager
 - HP Global Workload Manager and HP-UX Workload Manager
 - HP Insight Dynamics infrastructure orchestration
 - HP Systems Insight Manager
 - Partitioning Continuum
 - HP-UX Virtual Partitions (vPars) v6.0
 - HP Integrity Virtual Machines (with HP-UX guest OS's and Windows Guest OS's)
 - HP Process Resource Manager/pSets
 - Secure Resource Partitions
 - Continuous availability
 - HP Serviceguard for HP-UX 11i
 - HP Serviceguard Extensions for SAP
 - HP Serviceguard Extensions for Faster Failover
 - HP Insight Dynamics VSE Reference Architectures
 - Insight Dynamics VSE best practices including HP Capacity Advisor, HP Virtualization Manager, HP Global Workload Manager, HP Integrity Virtual Machines and HP Insight Dynamics infrastructure orchestration

• Form Factor:

- HP Integrity BL870c i2 server blade is a full-height, double wide (occupies 2 slots) BladeSystem c-Class form factor. The BL870c i2 server blade plugs into the BladeSystem enclosure. In the c7000 enclosure, 4 server blades are supported per 10U enclosure. 4 enclosures can be configured to a standard 42U rack; 16 BL870c i2 server blades can be configured in a fully populated rack. In the c3000 enclosure, 2 BL870c i2 server blades are supported per 6U enclosure.
- Enclosures:
 - HP offers two different c-Class server blade enclosures to meet your individual needs:
 - The HP BladeSystem c7000 rack enclosure is 10U high and holds up to 4 HP Integrity BL870c i2 servers plugged vertically. Four (4) enclosures can be configured to a standard 42U rack
 - The HP BladeSystem c3000 rack enclosure is 6U high and holds up to 2 HP Integrity BL870c i2 servers
 plugged horizontally. Up to 7 enclosures can be configured to a standard 42U rack
 - The HP BladeSystem c3000 Enclosure targets three separate market segments:
 - Remote sites needing between 2 and 8 server blades
 - Mid-sized companies with between 3 and 100 servers in their company
 - Enterprise accounts with special datacenter requirement, such as DC power, or very limited rack power and cooling capacity.
 - Server blades, storage blades, and interconnect modules are all designed to fit into the c7000 and c3000 enclosures. For additional enclosure information, please see:

http://h18004.www1.hp.com/products/blades/components/enclosures/c-class/index.html.

• Warranty:

- Protected by HP Services and a worldwide network of HP Authorized Channel Partners. Three-year parts, 3 Year Labor and 3 Year on-site limited global warranty. Certain restrictions and exclusions apply
- NEBS Compliance:
 - The HP BladeSystem c7000/BL870c i2 configuration offers a NEBS Level 3 DC powered option, which enables equipment operability in network facility environments. NEBS compliance is a requirement for Telecom Carriers and their Equipment Providers that are seeking to install equipment in central offices. They view compliance as key to ensuring personnel safety, protection of property, and operational reliability. There are three distinct



QuickSpecs

HP Integrity BL870c i2 Server Blade

Overview

certification levels specified in SR-3580, Network Equipment-Building System (NEBS) Criteria Levels. All carriergrade (CG) products released by HP are evaluated to the NEBS Level 3 criteria, which provides the maximum assurance of equipment operability in network facility environments. The Physical Components are described in GR-63-CORE, while the Electromagnetic Compatibility (EMC) and Safety components are described in GR-1089-CORE.

• This BL870c i2 system has met NEBS Level 3 and ETSI Certifications: NEBS NRTL Certified to NEBS Level-3 Criteria (GR-63-CORE, GR-1089-CORE) and ETSI Certified to EN 300 019, EN 300 386, and EN 300 753.



QuickSpecs

HP Integrity BL870c i2 Server Blade

Processor One of the following depending on Model	Quad-Core Processors Intel® Itanium® 9320 (1.33GHz/4-core/16MB/155W); up to 1.46 GHz with Turbo) Processor Intel® Itanium® 9340 (1.6GHz/4-core//20MB/185W); up to 1.73 GHz with Turbo) Processor Intel® Itanium® 9350 (1.73GHz/4-core/24MB/185W); up to 1.86 GHz with Turbo) Processor		
	Dual-Core Processors Intel® Itanium® 9310 (1.6GH	Iz/2-core/10MB/130W) Processor	
Upgradeability	Upgradeable to four (4) proc NOTE: The HP Integrity BL83 identical.	cessors 70c i2 supports 2, 3 or 4 processor configurations. Processors must be	
Cache Memory One of the following depending on Model	L2 cache per core; 512KB In L3 cache; up to 24MB, see p		
Chipset	Intel Boxboro		
Memory	and capacities	DDR3 registered memory modules (R-DIMMs) 16 GB (4 x 4 GB DIMMs) 768 GB (48 x 16 GB DIMMs) nsist of two (2) DIMMs. enabled in pairs of DIMMs. Double Chip Spare requires identical DIMM types ded in quads (two memory modules, 4 DIMMs)	
Network Adapter	Flex-10 capability requires (module. Learn more at: www NOTE: BL8x0c i2 server blac configurations NOTE: Each part is autosens interconnect components. One (1) additional 10/100 N NOTE: Up to twenty-four ad	(4) Broadcom Dual Port Flex-1010GbE Multifunction Server Adapter NOTE: OS drivers and the use of an HP Virtual Connect Flex-10 10GbE Ethernet w.hp.com/go/virtualconnect des require Virtual Connect 3.00 or later when used in Virtual Connect sing 1Gb/10Gb, and can interoperate with 1Gb HP BladeSystem c-Class IC dedicated to Integrity iLO 3 Management Iditional Gigabit Ethernet ports via the NC364m Quad-port mezzanine al 10 Gigabit Ethernet ports via the NC532m dual-port mezzanine adapter.	
Expansion Slots	Six Mezzanine slots, four (4) Type II and two (2) Type I, PCIe x8 Gen2		
Integrated Manageability	Integrity Integrated Lights-Out 3 (iLO 3) Factory installed Integrity iLO 3 Advanced Pack license HP BladeSystem c-Class Onboard Administrator HP BladeSystem c-Class Virtual Connect		
Storage Controller	Two (2) HP p410i 3Gb SAS Controller	4 SAS Channels (one to each HDD) Supports RAID 1, RAID 0, and HBA mode options Zero (0) cache, no cache options	
Maximum Internal Storage	Hot Plug SAS	3.6TB SAS 4 x 900GB SAS	



QuickSpecs

HP Integrity BL870c i2 Server Blade

Graphics	Integrated ATI RN50 1280 x 1024 x 16M color (128 MB DDR memory)		
	Resolution Color Depths Depths 1280 x 1024, 16.7M , 64k, 256,16 1024 x 768, 16.7M, 64k, 256, 16 800 x 600, 16.7M, 64k, 256, 16 640 x 480, 16.7M, 64k, 256, 16		
FlexFabric Support	Dual (2) ports via HP BLc NC553m Dual Port FlexFabric 10Gb Converged Network Adapter Dual (2) ports via HP BLc NC551m Dual Port FlexFabric 10Gb Converged Network Adapter		
	NOTE: BL8x0c i2 server blades require Virtual Connect 3.15 or later NOTE: Each port supports 10GbE Ethernet or 8Gb FCoE traffic.		
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information and for HP-UX support.		
	HP NC551m: http://h18004.www1.hp.com/products/quickspecs/13649_div/13649_div.html HP NC553m: http://h18004.www1.hp.com/products/quickspecs/13737_div/13737_div.html		
InfiniBand Support	Optional InfiniBand HCAs are supported by the HP Integrity BL860c i2 Server Blade. The mezzanine circuit board connects directly to the server blade system board.		
	HP 4X QDR InfiniBand ConnectX-2 Dual Port Mezzanine HCA for c-Class BladeSystem (PN 592519-B21)		
	 Features: Negotiates to DDR/QDR speeds Dual ports for redundant path connections Support for HP-UX 11i v3 Supported with HP 4X QDR InfiniBand Switch Module for c-Class BladeSystem (PN 489184-B21). For details specifications, please visit: http://www.hp.com/products1/serverconnectivity/adapters/infiniband/specifications.html 		
Fibre Channel Support	Optional Fibre Channel HBAs are supported by the HP Integrity BL870c i2. The mezzanine circuit board connects directly to the server blade system board.		
	 8Gb Fibre Channel Host Bus Adapters: QLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem (PN 451871-B21) Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem (PN 456972-B21) 		
	 8Gb Fibre Channel HBAs feature: 8/4/2/1Gb/s auto negotiating speeds Dual ports for redundant path connections Optimized for HP Storage and supported by third party SAN vendors Support for HP-UX 11i v3 		
Compatible SAN	HP Integrity BL870c i2 server blades are optimized for HP Storage MSA, EVA, and XP products.		
Smart Array Controller Support	Optional Smart Array Controller is supported by BL870c. The mezzanine circuit board connects directly to the server blade system board, and provides connection to off-blade SAS storage via a SAS interconnect switch module in the HP BladeSystem enclosure:		
	 HP Smart Array P711m/1G FBWC 4-ports Ext PCIe x8 6G SAS Controller (PN 513778-B21) Provides support for HP Zoned Storage for BladeSystem Zoned Storage solution requires compatible HP Storage 600 Modular Disk System and HP Storage 3Gb SAS BL Switch 		



QuickSpecs

HP Intearit	v BL870c i2	Server Blade
	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	SCITCI Blaac

		Advanced Data Cuarding (ADC)	
	Provides support for	Advanced Data Guarding (ADG) HP P2000 G3 MSA I G3 MSA requires HP Storage 6Gb SAS BL Switch	
	NOTE: For additional details p http://www8.hp.com/h20195	ease see: v2/GetDocument.aspx?docname=c04111558	
HP USB Options	External USB DVD drive with 6	ft USB extension cable is supported with c7000 enclosures.	
	 The solution includes the following components: External USB DVD drive with 9-inch USB cable Power adaptor, power cable and USB Y-connector 6-foot USB extension cable NOTE: The USB Y-connector goes between the extension cable and the 9-inch USB cable fixed with DVD drive. NOTE: The Y-connector should NOT be placed between the server blade and the 6-foot Extension cable. 		
Integrity Server Blades Management Software	HP-UX 11i Management Software for HP Integrity	Getting Started O HP Systems Insight Manager	
and HP Integrity	BL870c i2 Server Blade	• HP Insight Control for HP-UX 11i	
Essentials Software	and HP BladeSystem	 HP-UX 11i System Management 	
Plug-ins		• HP BladeSystem Integrated Manager in HP System Insight	
		Manager	
		 HP Onboard Administrator HP BladeSystem c-Class Onboard Administrator Firmware 	
		 HP BladeSystem C-Class OnDoard Administrator Firmware HP BladeSystem c-Class Virtual Connect Firmware 	
		• HP Insight Control for HP-UX 11i v3 (Included in Base OE)	
		Deploy	
		• HP Ignite-UX	
		 Software Distributor-UX 	
		 Software Package Builder 	
		 Dynamic Root Disk (DRD) 	
		Monitor	
		• HP Systems Insight Manager	
		 HP System Management Homepage Glance Plus Pak 	
		 Performance Manager and Agent 	
		 HP Serviceguard Manager 	
		Control	
		 HP Integrity Integrated Lights-Out (iLO) 3 (standard with BL870c i2 servers) 	
		 Integrity iLO 3 Advanced Pack license (included with BL870c i2 servers) 	
		Protect	
		 HP-UX Bastille Secure Paratitions 	
		 Secure Resource Partitions Data Protector Software 	
		 Data Protector Software Software Assistant (SWA) 	
		Optimize	
		• HP Capacity Advisory	
		• HP Virtualization Manager	
		 HP-UX Workload Manager 	
		 HP Global Workload Manager 	



QuickSpecs

HP Integrity	/ BL870c i2	Server Blade

Stanuaru reatures		
		 Process Resource Manager HP Insight Power Manager HP-UX 11i v3 power management Provision HP Insight Dynamics infrastructure orchestration Integrate HP Business Technology Optimization IT Management Software HP Insight Dynamics - VSE for HP Integrity server blades Learn More For additional information on HP Integrity server blade management software please visit:
Glossary of Integrity Server Blades Management Software Product Description	HP BladeSystem Integrated Manager in HP Systems Insight Manager	The HP BladeSystem Integrated Manager is a component in HP Systems Insight Manager (SIM) that provides streamlined management for the entire HP BladeSystem product family. The HP BladeSystem Integrated Manager enables users to quickly navigate their HP blade environments including blade servers, enclosure infrastructures, racks, and integrated switches, via automatically generated blade rack picture views and hierarchical trees. Users are able to conveniently configure, deploy, and manage individual or groups of blade systems. Additionally, users are able to quickly set up logical collections of blade systems for convenient management and control.
	HP Blades Visualization	Used by System Administrators to identify, associate and group blades into collections, using tables, trees, and picture views, and it can also be used to monitor performance and launch Integrity Essentials. NOTE: For more information about Manageability solutions for Integrity Servers go to: http://h20341.www2.hp.com/integrity/w1/en/software/essentials-overview.html.
	HP GlancePlus Pak	HP GlancePlus Pak provides you with a single product for managing a system's availability and performance. It is an integrated product that includes HP GlancePlus. As an integrated product, the GlancePlus Pak includes the real-time diagnostic capabilities of GlancePlus and the historical data collection capabilities of the Performance Agent. The performance agent is used with other availability and performance management products, thus providing an integrated real-time and historical performance management solution.
	HP Ignite-UX for HP-UX Deployments	HP Ignite-UX is a free toolset that enables a network install of HP-UX onto multiple PA-RISC and/or Integrity servers on a network. It can also be used to create custom install configurations, or golden images, recover systems remotely, create custom recovery media including tape, CD and DVD, and manage and monitor multiple client installation sessions.
	HP Capacity Advisor	The capacity planning component of HP Insight Dynamics - VSE, HP Capacity Advisor offers the industry's first lightweight, integrated tool for ongoing capacity planning by simulating the placement of application workloads to help IT administrators improve server utilization. It captures real-world server utilization data to pre-test different scenarios before



QuickSpecs

Standard Features

making changes to critical applications. HP Virtualization Manager The configuration management component of HP Insight Dynamics - VSE, HP Virtualization Manager provides a central point of control that allows you to manage all the resources in your environment, providing a powerful way to connect IT resources to real business needs. With its easy-to-use interface you can see all your available virtual and physicals resources and how they are being used. **HP Integrity Integrated** HP Integrity Integrated Lights-Out (iLO) management processors make it Lights-Out (iLO) 3 (factory simpler, faster, and less costly to remotely manage your Integrity servers. integrated with BL870c i2) HP Integrity iLO 3, ships with a built in Advanced Pack License. iLO Advanced features enabled in this release: Virtual Media, LDAP directory services, iLO power measurement, and integration with Insight Power Manager. No additional iLO licensing is needed. **NOTE:** Please see: www.hp.com/go/integrityilo for more information. HP Onboard Administrator The Onboard Administrator for the HP BladeSystem c7000 enclosure is the brains of the new c-Class infrastructure. Together with the enclosure's HP Insight Display, the Onboard Administrator has been designed for both local and remote administration of HP BladeSystem c-Class. This module and its firmware provides: Wizards for simple, fast setup and configuration Highly available and secure access to the HP BladeSystem • infrastructure Security roles for server, network, and storage administrators Automated power and cooling of the HP BladeSystem • infrastructure Agent-less device health and status Thermal Logic power and cooling information and control NOTE: Please see: http://www.hp.com/go/onbaordadministrator for more information. HP Serviceguard Manager HP Servicequard Manager is a graphical user interface (GUI) that provides configuration, administration, and monitoring capabilities for Serviceguard, Serviceguard Extension for RAC, Metrocluster, and Continentalclusters. Using Serviceguard Manager, operators see color-coded icons that provide a big-picture view of multiple clusters. From this big-picture view, operators can drill down and proactively manage clusters, systems (nodes). and packages that run applications. **HP Systems Insight** HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other Manager infrastructure devices across multiple operating system platforms. **HP System Management** HP System Management Homepage is a web-based interface that consolidates and simplifies the management of individual ProLiant and Homepage Integrity servers running Microsoft Windows or Linux operating systems, or

HP 9000 and HP Integrity servers running HP-UX 11i. By aggregating data from HP Insight Management Agents and other management tools, the System Management Homepage provides a secure and intuitive interface to



QuickSpecs

Standard Features

HP Integrity BL870c i2 Server Blade

review in-depth hardware configuration and status data, performance
metrics, system thresholds and software version control information. The
System Management Homepage can also be used to access the HP Lights-
Out Management processor on ProLiant and Integrity servers.

- HP Insight Dynamics VSE for HP Integrity servers HP Integrity servers which allows you to instantly adjust to dynamic business demands - with the new addition of infrastructure orchestration, not only can you easily plan, configure, and automate your physical and virtual resources in the same way, but now you can also provision and modify a complex infrastructure in minutes.
- HP-UX Software AssistantHP-UX Software Assistant (SWA) is a command-line based tool that
consolidates and simplifies patch management and security bulletin
management on HP-UX systems. The SWA tool is new for HP-UX releases
and includes Security Patch Check (SPC), and is the HP-recommended utility
to use to maintain currency with HP-published security bulletins for HP-UX
software.

HP-UX Workload Manager HP-UX Workload Manager (HP-UX WLM) is a resource management tool that provides automatic CPU resource allocation and application performance management based on your service-level objectives (SLOs) and business priorities. WLM is most effective managing applications that are CPU-bound. It automatically adapts system or partition CPU resources (cores) to the demands, SLOs, and priorities of the running applications. (A core is the actual data processing engine within a processor, where a single processor can have multiple cores, and a core can support multiple execution threads through Hyper-Threading, introduced with HP-UX 11i v3, as discussed below.) It adjusts the CPU allocation of a group of processes known as a workload, basing adjustment on the current needs and performance of the applications in that workload.

- HP Global Workload Manager The workload management capability for HP Integrity servers is provided by the HP Global Workload Manager component of HP Insight Dynamics -VSE. HP Global Workload Manager (gWLM), is an intelligent policy engine that automatically allocates resources among multiple workloads to increase server utilization while meeting service levels for high-priority applications. Designed to work across multiple HP-UX 11i, OpenVMS and Linux environments, the workload management features are ideal for large, centralized IT environments that host applications for many departments.
- HP Insight Dynamics
infrastructureHP Insight Dynamics infrastructure orchestration capabilities let you
provision infrastructure in minutes to automatically activate physical and
virtual servers, storage, and networking from pools of shared resources.
Whether you need a single virtual machine or infrastructure for a complex
three-tier application, Insight Dynamics infrastructure orchestration finds
available resources, streamlines the approval process, and automatically
provisions and configures what's needed across infrastructure silos.
Delivering infrastructure to the business becomes faster, more efficient,
and more reliable.

Performance Manager and HP Performance Manager, Agents, and Monitor combine to provide a powerful and flexible distributed management solution. This solution is a



QuickSpecs

Standard Features

HP Integrity BL870c i2 Server Blade

single interface for centrally monitoring, analyzing, and forecasting resource utilization for distributed multi-vendor environments, enabling you to offer the best possible level of service in a cost-effective manner.

- Process Resource Manager HP Process Resource Manager (HP PRM) is a resource management tool used to control the amount of resources that processes use during peak system load. HP PRM can manage allocation of the following resources:
 - CPU: Ensures a minimum allocation of CPU; can also simultaneously cap CPU resource usage for each group in the configuration. (Starting with HP-UX 11i v3, per-group capping is available.)
 - Memory: Ensures a minimum allocation of private real memory; can also cap private memory usage. Allows you to allocate an exact amount of shared memory.
 - Disk bandwidth: Ensures a minimum allocation of disk bandwidth

Secure Resource Partitions One method that HP Insight Dynamics - VSE uses to improve server resource utilization is to consolidate multiple applications within a single operating system image. Secure Resource Partitions combine kernel level security and proven resource management to stack multiple applications within the same operating system. HP Process Resource Manager and HP-UX Workload Manager can dedicate specific resources to specific applications within an operating system image, avoiding resource contention issues. Using HP-UX 11i v3 Security Containment, organizations can ensure that application instances cannot access processes or files from other applications or the system. This ensures that multiple application instances run securely in a consolidated environment, providing the benefits of consolidation while preserving the security of a scale out environment. For software licensing purposes, the maximum number of CPUs in a Secure Resource Partition can be capped.

Software Distributor-UX Software Distributor (SD) is the HP-UX administration tool set used to deliver and maintain HP-UX operating systems and layered software applications. SD is delivered as part of HP-UX; you do not need to download it separately.

Insight Control for BladeSystem Management

Insight Control for BladeSystem delivers foundation management for HP BladeSystem lifecycles, including hardware resource deployment, health monitoring, software version control, performance monitoring, and power management.

Integrity blades are supported with the following ICE components, installed automatically when using the wizard-based integrated installer:

- HP Systems Insight Manager
- Extensions for SIM on Microsoft Windows CMS (to manage HP-UX)
- HP BladeSystem Integrated Manager
- Insight Power Manager

NOTE: For Licensing and Packaging Options please see the options section of this QuickSpecs. **NOTE:** Insight Control Environment for BladeSystem is delivered with HP BladeSystem c-Class enclosures with either 8 or16-server licenses, or 8 server evaluation licenses (30-days). For additional information on HP BladeSystem c-Class Infrastructure please visit: HP BladeSystem c-Class Infrastructure QuickSpecs at:



QuickSpecs

Standard Features	
	http://h18000.www1.hp.com/products/quickspecs/12517_div/12517_div.html NOTE: For additional product and licensing information about Insight Control Environment, HP Systems Insight Manager and Essentials software refer to: http://www.hp.com/servers/proliantessentials.
OS Support	HP-UX 11i v3 Data Center Operating Environment (DC-OE) HP-UX 11i v3 Virtual Server Environment (VSE-OE) HP-UX 11i v3 High Availability Environment (HA-OE) HP-UX 11i v3 Base Operating Environment (BOE)
	NOTE: For more complete and up to date information on HP-UX 11i support, please visit the HP-UX 11i website at: www.hp.com/go/hpux11iblades.
	OpenVMS 8.4 (choice of Mission Critical, Enterprise, or Foundation Operating Environment) NOTE: For more complete and up to date information on OpenVMS support, please visit the OpenVMS website at: www.hp.com/go/openvms
	Microsoft Windows Server 2008 for Itanium-based systems NOTE: For more complete and up to date information on Windows support, please visit the Windows website at: www.hp.com/go/integrity/windows
Supported Software Options	HP Insight Dynamics - VSE for HP Integrity servers (included within both the VSE-OE and DC-OE), which includes the following capabilities for Integrity blades:
	HP-UX Virtual Partitions (vPars) v6.0 HP Integrity Virtual Machines for HP-UX HP Virtualization Manager HP Capacity Advisor HP Secure Resource Partitions HP-UX Workload Manager or HP Global Workload Manager HP Online Integrity VM Guest HP Serviceguard for HP-UX 11i HP Serviceguard Manager HP Serviceguard Extensions for SAP HP Serviceguard Extensions for Faster Failover HP Insight Control power management GlancePlus Pak Performance Manager and Agent
Intelligent Manageability	HP Integrity Integrated Lights-Out 3 Virtual serial console (Multiple, mirrored sessions, with previous context and console log buffer)
	Virtual Power Button Control
	iLO 3 power measurement and integration with Insight Power Manager
	 Embedded system health and Integrity fault management Diagnostics and troubleshooting: virtual front panel log access to Integrity System Event Log Forward Progress Log Blade power consumption reading
	Dedicated LAN Connectivity Automatic IP Configuration via DHCP/DNS/WINS browser Command Line and scripted access Industry Standard RC4, 128-bit Secure Sockets Layer (SSL) and Secure Shell (SSH) Security Directory Services Integration (LDAP)



QuickSpecs

HP Integrity BL870c i2 Server Blade

Standard Feature	2S			
	Support for 19 user accounts with customizable access privileges NOTE: iLO 3 Advanced Pack license is included with every BL870c i2 server blade. iLO 3 Advanced Pack features enabled in this release are Virtual Media, LDAP Directory Services Integration, iLO power measurement, and integration with Insight power manager.			
Availability	Dual-Port Fibre Channel Mezzanine Card for redundant SAN connection Four hot-plug SAS hard drive bays and two (2) integrated RAID (HP Smart Array p410i) controllers on every server blade			
	 Network adapter teaming (network fault tolerance, transmit load balancing, switch-assisted load balancing) supported on integrated LOMs and with add-in Mezzanine cards. ECC protected DDR3 registered memory modules (R-DIMMs) Memory double chip spare to overcome two DRAM chip failures Dynamic Processor resilience and deallocation with HP-UX Journal file system with HP-UX* Auto reboot HP Serviceguard for HP-UX* HP Serviceguard Extension for RAC for HP-UX* HP Serviceguard Extension for SAP for HP-UX* Serviceguard Manager for HP-UX clusters* HP Event Monitoring Service HA Monitors for HP-UX HP Mirrordisk/UX* (Included if purchase HP-UX 11i VSE, DC, or HA OES) Extended Campus Cluster*, HP Metrocluster*, and HP Continentalclusters* for HP UX HP System Insight Manager (SIM) for proactive fault management HP Serviceguard Storage Management Suites for HP-UX* NOTE: *Fee based software products. 			
Security	Hardware Security			
	 Administrator's password Integrity iLO 3 access control- 19 customizable local user accounts with assignable rights for power, console, configuration, etc. OA and Integrity iLO 3 Directory Services Integration (LDAP) Integrity iLO 3 access via SSL encryption or SSH Integrity iLO 3 access methods via web, SSH, etc. can be disabled SSL encryption on web console Trusted Platform Module (TPM) option for secure cryptographic key storage, integrates with HP-UX security features 			
	Platform security fundamentals			
	For the past 25 years HP has been building one of the most trustworthy and secure UNIX operating systems on the market. Designed for the optimal protection against both external and internal threats. HP-UX 11i offers industry-leading breadth and depth of UNIX security features. Focused on comprehensive security integration aimed at proactively mitigating risk, reducing compliance cost and accelerating time to implementation, HP-UX security solutions significantly lower IT costs. This set of fully integrated and complementary features is designed to provide layered security with in-depth protection of all your enterprise assets by protecting all these aspects of data, systems, data and identity security. HP-UX independently validates its comprehensive security portfolio through Common			



Criteria security evaluation. For more details, visit: www.hp.com/go/hpux11isecurity

QuickSpecs

HP Integrity BL870c i2 Server Blade

Standard Features

Protecting systems:

One critical factor in enterprise security is system minimization and hardening. HP-UX 11i offers a set of security features designed to address known and unknown vulnerabilities by running only the services that are needed, thus minimizing a potential point of attack. The following security features have built-in mechanisms not only to minimize and harden the system, but also to detect and react to attack in real time:

- Bastille system hardening
- Host Intrusion Detection System
- Secure Resource Partitions
- IPFilter firewall technology
- Software Assistant (security bulletin currency)
- Install-time Security
- Boot Authentication
- Standard Mode Security Extensions
- Shadow Passwords
- Strong Random Number Generator

Protecting data:

HP-UX 11i offers data protection in many forms: protecting data in transit, in use and at rest. By using security features designed to protect data in its three forms, HP-UX 11i customers can minimize possible breaches not only in terms of data loss, but in customer trust as well. Several security features offer data protection capabilities to HP-UX customers:

- Encrypted volume and file system
- Trusted Computing Services
- Security containment
- OpenSSL
- IPSec
- Secure Shell
- MD5sum

Protecting Identity:

In modern day global enterprise companies, managing identity is not an easy task, especially as identity management requirements grow to include employees, contractors, partners and suppliers across many countries with various privacy protection laws and regulation. HP-UX 11i dramatically simplifies this critical task by integrating various identity management technologies which offer ease of use and adherence to compliance regulation:

- Identity Management Integration
- Select Access for IdMI
- Role-based Access Control
- AAA Server
- HP Directory Server for HP-UX
- LDAP-UX Client
- Kerberos Server
- Kerberos Client Services
- PAM Kerberos

NOTE: HP also offers many additional security features available through open source software for HP-UX.

Common Criteria certification



QuickSpecs

Standard Features

	Many enterprise and government customers require this vendor-independent security certification because it increases confidence in the product's security assurance, functionality, quality and effectiveness. Many governments, including the United States, require certification for government IT procurement.
	Certification evaluations are only conducted by the evaluation agency after release of the product. HP- UX 11i v3, has been actively evaluated to the Common Criteria (CC) Security standards for many years. A history of our achievements include:
	 February 2003: Certification of HP-UX 11i V1 achieves A CC to Evaluation Assurance Level 4 May 2006: Certification of HP-UX 11i V2 to the current EAL4 Common Criteria May 2008: Certification of HP-UX 11iV3 achieved including hard partitions (nPars) December 2009: Certification of HP-UX 11iV3 to CCOPP profile including soft partitions (vPars)
	Common Criteria certifications continue to be an integral part of our HP-UX comprehensive security portfolio. HP-UX 11i v3 has successfully completed a new Commercial off the Shelf (COTS) Compartmentalized Operations Protection Profile (CCOPP) evaluation. This new CCOPP evaluation encompasses the extensive range of security solution for HP-UX 11i v3 including soft partitioning or Virtual partitions (vPars) as well as the previously certified hard partitions (nPars).
Factory Express Portfolio for Servers and Storage	HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.
	Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP Integrity Server Blades, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1xxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.
	For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express .
HP Simple Configurator	SCE is a guided self service tool to help sales and non technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact HP's Customer Business Center or an Authorized Partner for assistance. http://www.hp.com/products/configurator
Service and Support	HP Care Pack Services are available for the HP Integrity BL870c i2 server blade. These services offer integrated hardware and software support to help customers maintain a robust, stable, flexible IT environment that enhances their business agility. They encompass today's most popular products, including UNIX, Windows and Linux servers, as well as mobile technology, network devices, desktops, printers, storage solutions, management software and more.
	All of these Service offerings let customers leverage HP Services multi-vendor, multi-technology experience and expertise; global reach with delivery capabilities; single-point-of-contact problem diagnosis and resolution; advanced remote monitoring and performance enhancement technologies; and proven support management processes based on IT best practices.
	HP Services professionals can help customers identify the support offering that fits their business and



QuickSpecs

HP Integrity BL870c i2 Server Blade

Standard Features

technology goals. HP Services include:

- HP Critical Service comprehensive preventive services and super-responsive support to maximize availability and minimize downtime risk exposure in mission-critical environments
- HP Proactive 24 Service collaborate with HP Services professionals to improve operational effectiveness, performance, and stability through joint services planning and 24x7 hardware/Software Support
- HP Foundation Care provides hardware and software support services

These products are covered by a global limited warranty and supported by HP Services. **NOTE:** Server Blade Limited Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support. **NOTE:** Server Blade Enclosure Limited Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support.

A complete range of HP Care Pack services are available including:

- Proactive Select a cost effective method of buying service credits up front to be used for consultancy and service options as needed.
- Installation and start up
- Education courses
- Extended onsite hardware coverage hours from same business day 13 hours, 5 day to 24 hours, 7 days call window with options including 4-hour response or 6-hour Call To Repair
- Comprehensive range of software technical support.

NOTE: For more information regarding the Blade service portfolio visit our worldwide web site on the internet at: http://h20219.www2.hp.com/services/cache/81725-0-0-225-121.html

HP Services for the c7000 Enclosure cover the enclosure, power supplies and fans. HP qualified rack options are covered by these services when installed within the same rack. HP Supported Ethernet devices covered include the Ethernet Pass-Through Module, Fibre Channel Pass-Through Module and GbE2c Ethernet Blade Switch and Cisco Catalyst 3020 Blade Switch.

For a complete listing of service offerings and information visit: http://www.hp.com/services/bladesystemservices http://www.commoncriteriaportal.org/files/epfiles/hp-ux11iv2.pdf.



QuickSpecs

HP Integrity BL870c i2 Server Blade

Support Services

HP Technology Services for Integrity Servers

HP Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to HP to help prevent problems and solve issues faster. Our support technology lets you to tap into the knowledge of millions of devices and thousands of experts to stay informed and in control, anywhere, any time.

Protect your business beyond warranty with HP Care Pack Services

HP Care Pack Services enable you to order the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement for the term you select.

NOTE: Care Pack Services availability may vary by product and country.

Recommended HP Care Pack Services for optimal satisfaction Integrity Servers:

Optimized Care

HP Proactive Care Advanced - 24x7 coverage, three year Care Pack Service

Achieve a higher return on your product investment with the personal attention from a locally assigned Account Support Manager who delivers recommendations designed to improve availability and performance. Leverage your system's ability to connect to HP for automated problem detection and rapid critical event management to increase stability and reduce unplanned downtime. This recommendation provides 24x7 coverage with four-hour response for hardware and two-hour callback for supported software. Collaborative call management comes with Proactive Care Advanced or you may choose full support from HP where we own all cases through to resolution. HP is a leading provider of support services for most operating systems used on HP BladeSystem with long, successful partnerships with vendors such as Microsoft, Red Hat, VMware, SUSE and others. Purchasing software support from HP simplifies troubleshooting and shortens time to resolution with one call for hardware or software questions.

http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA5-3259ENW&cc=us&lc=en

Basic Care

HP Proactive Care with 24x7 coverage, three year Care Pack Service

HP Proactive Care helps prevent problems and stabilize IT by utilizing secure, real-time, predictive analytics and proactive consultations when your products are connected to HP. This Care Pack Service combines three years' proactive reporting and advice with our 24x7 coverage and enhanced escalation management, four hour hardware response time and two hour call back for software questions on leading industry standard software running on your HP ProLiant server. http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA3-8855ENW.pdf

Related Services

HP Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

Factory Express for Servers and storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express.

Data Privacy Services

Protect your data through better media management. HP Data privacy services help manage and protect sensitive data to reduce the risk of unauthorized access to private information and help meet compliance requirements. Our retention services allow you



QuickSpecs

HP Integrity BL870c i2 Server Blade

Support Services

to keep drives and other devices upon failure, our removal services provide convenient data sanitization and our recovery services allow you to safely retire IT assets and capture any remaining value from the hardware. www.hp.com/services/dataprivacy

Additional HP Care Pack services can be found at: http://www.hp.com/go/cpc

eSupport

Get connected to HP to improve your support experience

Prevent problems with innovative, automated monitoring tools and proactive services. Combining Proactive Care Services with our remote support technology such as Insight Online provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: www.hp.com/go/proactiveinsightexperience

HP Support Center

Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more http://www.hp.com/go/hpsc

HP's Support Center Mobile App** allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.

** HP Support Center Mobile App is subject to local availability

Parts and Materials

HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction.



HP Integrity BL870c i2 Server Blade

QuickSpecs

Models

Base Models

HP Integrity BL870c i2 Processor(s) Four (4) processor sockets; processor modules are configured to order. Base Unit for c7000 Supports up to four (4) Enclosure processors AH383A **Cache Memory** Included with processors. All processor models HP Integrity BL870c i2 Memory Forty eight (48) DIMM sockets; memory DIMMs are configured to order. Base Unit for c3000 Enclosure **Network Adapter** Eight (8) NIC ports via (4) NC532i Dual Port Flex-1010GbE Multifunction AM329A Server Adapter NOTE: Flex-10 capability requires OS drivers and the use of an HP Virtual Connect Flex-10 10GbE Ethernet module. Learn more at http://www.hp.com/go/virtualconnect **NOTE:** BL8x0c i2 server blades require Virtual Connect 3.00 or later when used in Virtual Connect configurations **NOTE:** Each part is autosensing 1Gb/10Gb, and can interoperate with 1Gb HP BladeSystem c-Class interconnect components. One (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management **Storage Controller** Integrated HP Smart Array p410i SAS Controller **Hard Drives** Four SFF SAS drive bays; hard disk drives are configured to order. **IO** expansion Six PCIe mezzanine card slots (PCIe Gen2 x8 interface); mezzanine card are configured to order **Optical Drive** None internal to blade server Integrity iLO 3 Integrity iLO 3 Advance Pack license included **Form Factor** Supports up to 2 BL870c i2 in HP BladeSystem c3000 Enclosure Supports up to 4 BL870c i2 in HP BladeSystem c7000 Enclosure



NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations

QuickSpecs

HP Integrity BL870c i2 Server Blade

Configuration Information - Factory Integrated Models

NOTE: FIO indicate	er servers must start with a CTO Enclosure es that this option is a Factory Installable Option. se Required Base Server Blade Configuration	
Base Unit	HP Integrity BL870c i2 c7000 Server Blade NOTE: Choose the base models. NOTE: Adding Option code "#0D1" to the Server Blade P/N will integrate the configured blade into the enclosure (which must be on the same order) NOTE: When adding Option code "#0D1," must select whether server blade should be installed in an odd slot of the c7000 enclosure (AH383A#001) or in an even slot (AH383A#002).	AH383 <i>4</i>
	HP Integrity BL870c i2 c3000 Server Blade NOTE: Choose the base models. NOTE: Adding Option code "#0D1" to the Server Blade P/N will integrate the configured blade into the enclosure (which must be on the same order) NOTE: When adding Option code "#0D1," must select whether server blade should be installed in an odd slot of the c3000 enclosure (AH329A#001) or in an even slot (AH329A#002).	AM3294
	Configurable Model ships with:	
	Eight embedded 10 Gigabit Ethernet NIC ports with Flex-10 support plus (1) additional 10/100 NIC dedicated to Integrity iLO 3 Management	
	Two Integrated HP p410i hardware RAID controller	
	Four small form factor (SFF) SAS hot plug hard drive bays	

Step 2: Choose Required Options (one of the following from each list unless otherwise noted):

HP Processors	NOTE: Select minimum two (2) and maximum four (4) processors.			
	Quad-Core Processors			
	HP BL8x0c i2 Itanium 9320 (1.33GHz/4-core/16MB/155W) Processor Kit	AH386A		
	HP BL8x0c i2 Itanium 9340 (1.6GHz/4-core//20MB/185W) Processor Kit	AH387A		
	HP BL8x0c i2 Itanium 9350 (1.73GHz/4-core/24MB/185W) Processor Kit	AH388A		
	Dual-Core Processor			
	HP BL8x0c i2 Itanium 9310 (1.6GHz/2-core/10MB/130W) Processor Kit	AH385A		
HP Memory	NOTE: Select minimum two (2) modules per server and maximum twenty four (24) modules per server if 4 processors ordered.			
	HP Integrity BL8x0c i2 8GB (2x4GB) PC3-10600 Registered CAS 9 Memory Kit	AM327A		
	HP Integrity BL8x0c i2 16GB (2x8GB) PC3-10600 Registered CAS 9 Memory Kit	AM328A		



QuickSpecs

HP Integrity BL870c i2 Server Blade

Configuration Information - Factory Integrated Models

HP BL8x0c i2 32GB (2x16GB) PC3-10600 Registered CAS-9 Memory Kit	AM363A
NOTE: Memory Modules consist of two individual DIMMs.	
NOTE: DIMMs must be installed in quads. Therefore, memory modules must be	
ordered two (2) at a time, to reach quads (4) to be installed.	

Step 3: Choose Additional Options for Factory Integration

HP Hard Drives	NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.	
	SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives	
	HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785079-B21
	HP 900GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785075-B21
	HP 600GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785073-B21
	HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	581284-B21
	HP 300GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785099-B21
	HP 450GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785101-B21
	HP 600GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785103-B21
	HP 300GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785071-B21
	HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
	NOTE: Though the disks are 6Gb/12Gb, implementation of the embedded HP Smart Array SAS RAID controller limits performance of disks	
	12G SAS Hot Plug Enterprise Performance Solid State Drives	
	HP 200GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802576-B21
	HP 400GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802580-B21
	HP 800GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802584-B21
HP Ethernet Mezzanine	HP NC364m Quad Port 1GbE BL-c Adapter	447883-B21
Options	NOTE: Provides four additional 1GbE ports.	
	HP NC360m Dual Port 1GbE BL-c Adapter	445978-B21
	NOTE: Provides two additional 1GbE ports.	
	HP NC532m Dual Port 10GbE Multifunction BL-c Adapter NOTE: The NC532m network adapter card is required for each server blade connecting to a 10Gb interconnect in bays 3-8 (HP BladeSystem c7000 Enclosure) or bays 3-4 (HP BladeSystem c3000 Enclosure. NOTE: The NC532m requires a minimum of 2 GB of server memory. NOTE: The NC522m supports linking only at 1000Mbps or 10000Mbps when not connected to the HP Virtual Connect Flex-10 Ethernet Module.	467799-B21
	HP NC552m 10Gb 2-port Flex-10 Ethernet Adapter NOTE: Provides Flex-10 connectivity when used in conjunction with the HP Virtual Connect Flex-10 10Gb Ethernet Module for the c-Class BladeSystem Option (P/N 455880-B21).	610609-B21
HP FlexFabric Mezzanine Options	HP NC553m 10Gb 2-port FlexFabric Adapter NOTE: Provides Ethernet and FCoE connectivity when used in conjunction with HP Virtual Connect FlexFabric 10Gb/24-Port Module (PN 571956-B21).	613431-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	



QuickSpecs

HP Integrity BL870c i2 Server Blade

Configuration Information - Factory Integrated Models

	information: HP NC551m: http://h18004.www1.hp.com/products/quickspecs/13649_div/13649_div.html HP NC553m: http://h18004.www1.hp.com/products/quickspecs/13737_div/13737_div.html HP Virtual Connect FlexFabric Module http://h18004.www1.hp.com/products/quickspecs/13652_div/13652_div.html	
HP Fibre Channel Mezzanine Options	QLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem NOTE: BL870c i2 supports HP Virtual Connect Fibre Channel Interconnect Modules. See: http://www.hp.com/go/bladesystem/virtualconnect for complete details.	451871-B21 456972-B21
HP Infiniband Mezzanine Options	HP 4X QDR InfiniBand ConnectX-2 Dual Port Mezzanine HCA for c-Class BladeSystem NOTE: Provides DDR/QDR InfiniBand connectivity when used in conjunction with HP BLc 4X QDR IB Switch for HP BladeSystem c-Class (PN 489184-B21). NOTE: For more support details, please visit the following web-page: http://www.hp.com/products1/serverconnectivity/adapters/infiniband/ specifications.html	592519-B21
HP Security - TPM	HP Integrity BL8xOc i2 Trusted Platform Module NOTE: The TPM must be installed by the factory.	AM331A

Step 4: Choose Additional Options for Field Upgrades

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below. For additional options, including server blade enclosures interconnect, mezzanine options and power subsystem options; please see the Core Options and Additional sections below; or the following:

HP BladeSystem c-Class Enclosures QuickSpecs: -HP BladeSystem c3000 Enclosure QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12790_div/12790_div.html -HP BladeSystem c7000 Enclosure QuickSpecs: http://h18000.www1.hp.com/products/quickspecs/12810_div/12810_div.html -and HP BladeSystem c-Class Interconnect and Mezzanine Components: http://h18004.www1.hp.com/products/blades/components/c-class-interconnects.html http://h18004.www1.hp.com/products/blades/components/c-class-adapters.html



QuickSpecs

Additional Options

	HP NC532m Dual Port 10GbE Multifunction BL-c Adapter	467799-B21
	455880-B21). HP NC532m Dual Port 10GbE Multifunction BL-c Adapter NOTE: The NC532m network adapter card is required for each server blade connecting to a 10Gb interconnect in bays 3-8 (HP BladeSystem c7000 Enclosure) or	467799-B21
	bays 3-4 (HP BladeSystem c3000 Enclosure. NOTE: The NC532m requires a minimum of 2 GB of server memory. NOTE: The NC522m supports linking only at 1000Mbps or 10000Mbps when not	
	connected to the HP Virtual Connect Flex-10 Ethernet Module.	
	NOTE: Provides Flex-10 connectivity when used in conjunction with the HP Virtual Connect Flex-10 10Gb Ethernet Module for the c-Class BladeSystem Option (P/N 455880-B21).	
HP FlexFabric Mezzanine Options	HP NC553m 10Gb 2-port FlexFabric Adapter NOTE: Provides Ethernet and FCoE connectivity when used in conjunction with HP Virtual Connect FlexFabric 10Gb/24-Port Module (PN 571956-B21).	613431-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: HP NC551m:	
	http://h18004.www1.hp.com/products/quickspecs/13649_div/13649_div.html HP NC553m:	
	http://h18004.www1.hp.com/products/quickspecs/13737_div/13737_div.html HP Virtual Connect FlexFabric Module	
	http://h18004.www1.hp.com/products/quickspecs/13652_div/13652_div.html	
HP Fibre Channel Mezzanine Options	Emulex LPe1205 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem QLogic QMH2562 8Gb Fibre Channel Host Bus Adapter for c-Class BladeSystem	456972-B21 451871-B21
HP Processors	Quad-Core Processors	
(field upgrade only)	HP BL8x0c i2 Itanium 9320 (1.33GHz/4-core/16MB/155W) Processor Kit	AH386A
	HP BL8x0c i2 Itanium 9340 (1.6GHz/4-core//20MB/185W) Processor Kit	AH387A
	HP BL8x0c i2 Itanium 9350 (1.73GHz/4-core/24MB/185W) Processor Kit	AH388A
	Dual-Core Processor	
	HP BL8x0c i2 Itanium 9310 (1.6GHz/2-core/10MB/130W) Processor Kit	AH385A
	NOTE: HP Integrity BL870c i2 processor upgrade kits contain one processor.	
	Processors in a given server blade must be identical. No mixing of processor models	
	is allowed.	



QuickSpecs

HP Memory HP Hard Drives	HP Integrity BL8x0c i2 8GB (2x4GB) PC3-10600 Registered CAS 9 Memory Kit HP Integrity BL8x0c i2 16GB (2x8GB) PC3-10600 Registered CAS 9 Memory Kit HP BL8x0c i2 32GB (2x16GB) PC3-10600 Registered CAS-9 Memory Kit NOTE: Memory Modules consist of duals of DIMMs DIMMS must be installed in quads. Therefore, memory modules must be ordered two (2) at a time, to reach quads (4) to be installed. NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the lowest numbered slots.	AM327A AM328A AM363A
	hard drive QuickSpecs for details.	
	SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives	
	HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785079-B21
	HP 900GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785075-B21
	HP 600GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785073-B21
	HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard	581284-B21
	Drive	501204 021
	HP 300GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785099-B21
	HP 450GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785101-B21
	HP 600GB 12G SAS 15K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785103-B21
	HP 300GB 12G SAS 10K rpm SFF (2.5-inch) Enterprise 3yr Warranty Hard Drive	785071-B21
	HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive	512547-B21
	NOTE: Though the disks are 6Gb/12Gb, implementation of the embedded HP Smart Array SAS RAID controller limits performance of disks NOTE: Please see the QuickSpecs for Technical Specifications and additional information related to HDDs: http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html (Worldwide)	
	12G SAS Hot Plug Enterprise Performance Solid State Drives	
	HP 200GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802576-B21
	HP 400GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802580-B21
	HP 800GB 12G SAS Write Intensive SFF 2.5-in 3yr Wty Solid State Drive	802584-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information related to HDDs:	
	http://h18000.www1.hp.com/products/quickspecs/14038_div/14038_div.html (Worldwide)	
HP Integrity Upgrade Kits	HP Integrity BL8x0c i2 Upgrade Blade NOTE: At least one (1) processor must be purchased with each upgrade blade; other components may also be ordered. All processors in the upgraded server blade must be of the same type.	AM360A
	HP Integrity BL2 Blade Link Upgrade NOTE: Required for BL870c i2 server blade used in odd slot of c7000 or c3000 Enclosures.	AM358A



QuickSpecs

Additional Options

·	HP Integrity BL2-c7E Blade Link Upgrade NOTE: Required for BL870c i2 server blade used in even slot of c7000 Enclosure.	AM364A
	HP Integrity BL2-c3E Blade Link Upgrade NOTE: Required for BL870c i2 server blade used in even slot of c3000 Enclosure.	AM365A
	HP Integrity BL4 Blade Link Upgrade NOTE: Required for BL890c i2 server blade used in c7000 Enclosure.	AM359A
	HP Integrity BL4-c3 Blade Link Upgrade NOTE: Required for BL890c i2 server blade used in c3000 Enclosure.	AM366A
HP Smart Array Controller	HP Smart Array P711m/1G 6Gb FBWC 4-ports Ext Mezzanine SAS Controller NOTE: The P711M will function as a SAS RAID controller when connected to MDS600 disk subsystem via the HP BLc 6Gb SAS Switch. In the RAID mode, HP-UX 11i v3 is supported. NOTE: The P711mM will function as a Pass-Thru when connected to the HP P2000G3 SAS Storage Array via the HP BLc 6Gb SAS Switch. In the Pass-Thru mode, HP-UX 11i v3 is supported. For more details please see QuickSpec: http://h18004.www1.hp.com/products/quickspecs/14035_div/14035_div.html	513778-B21
	Optional Upgrade	
	HP Smart Array P-Series Low Profile Battery	452348-B21
	 NOTE: The P700M will function as a SAS RAID controller when connected to MDS600 disk subsystem via the Storage 3Gb SAS Switch. In the RAID mode, HP-UX 11i v3 and integrity for Windows 6.2 are supported. NOTE: The P700M will function as a Pass-Thru when connected to the MAS2300sa G2 SAS Storage Array via the Storage 3Gb SAS Switch. In the Pass-Thru mode, HP-UX 11i v3 and Integrity for Windows 6.2 are supported. NOTE: The optional battery is required for Advanced Data Guarding (enabled with SSAP), RAID 6 and is highly recommended for RAID 5 implementations. NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13175_div/13175_div.html 	
HP Infiniband Mezzanine Options	HP 4X QDR InfiniBand ConnectX-2 Dual Port Mezzanine HCA for c-Class BladeSystem NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/12586_div/12586_div.html	592519-B21
HP Ethernet Interconnects	HP Virtual Connect FlexFabric 10Gb/24-port Module for c-Class BladeSystem NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13652_div/13652_div.html	571956-B21
HP Storage Blade	HP D2200sb PCIe Storage Blade NOTE: Please see QuickSpecs for Technical Specifications and additional options at: http://h18004.www1.hp.com/products/quickspecs/13714_div/13714_div.html	AP880A
HP USB Options	HP Integrity USB External DVD/RW Drive NOTE: The HP Integrity USB External DVD-RW drive solution includes the External DVD drive (AT120B) with 9 inch USB cable, power adaptor, power cable and Y-	AT120B



QuickSpecs

Additional Options

	connector and 6-foot USB extension cable. NOTE: The USB Y-connector goes between the extension cable and the 9-inch USB cable fixed with DVD drive. NOTE: The Y-connector should NOT be placed between the server blade and the 6- foot Extension cable.	
HP Care Pack Services	HP offers a range of support services and additional services. For a complete listing of services, see: HP.com external site: http://www.hp.com/services/bladesystemservices	
	HP Critical Service	
	HP CP 1Y Critical Service	HA112A1
	HP CP 3Y Critical Service	HA112A3
	Installation Services	
	HP CP Installation	HA113A1
	NOTE: For more information: http://www.hp.com/services/bladesystemservices.	



QuickSpecs

HP Integrity BL870c i2 Server Blade

Memory

DIMM installation guidelines:

- 1. All DIMMs must be DDR3 registered memory modules (R-DIMMs)
- 2. All four DIMM slots in a memory bank must be populated. For each CPU, the memory banks are designated as follows: first bank consists of pairs A and B, second bank consists of pairs C and D and the third bank consists of pairs E and F.
- Banks must be populated in sequential Alphabetic order, starting with bank A and B for CPUO, followed by banks A and B 3. for CPU1, etc.
- 4. All four DIMMs in a memory bank must be identical. Install identical DIMMs in quads, starting with DIMM pairs A and B CPU0.
- 5. DIMMs must be installed in decreasing capacity with the largest DIMMs installed in the smallest numbered DIMM slot.

HP Integrity BL870c i2 Server Blade

Standard Memory

16 GB Registered PC310600 DDR3 1333MHz ECC DIMMs (4 x 4 GB) Memory Bus Bandwidth: 4.8GT/s

Standard Memory Plus Optional Memory

Up to 768GB of DDR3 registered memory is available.

Following are memory options available from HP:


HP Memory	HP Integrity BL8x0c i2 8GB (2x4GB) PC3-10600 Registered CAS 9 Memory Kit	AM327A
	HP Integrity BL8x0c i2 16GB (2x8GB) PC3-10600 Registered CAS 9 Memory Kit	AM328A
	HP BL8x0c i2 32GB (2x16GB) PC3-10600 Registered CAS-9 Memory Kit	AM363A
	NOTE: Must be installed in quads. Therefore, must install two (2) AM327 memory modules at a time.	
	NOTE: DIMMs must be installed in decreasing capacity with the largest DIMMs smallest numbered slot.	

QuickSpecs

Storage

HP Integrity BL870c i2 Server Blade

1-4 4 x SFF SAS Hot Plug Hard Drives

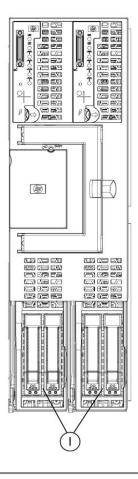

Hard Drives

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details. **SAS Hard Drive**

	Quantity Supported	Position Supported	Controller
1.2TB 12G 10K SFF	4	1-4	HP Smart Array P410i Controller
900GB 12G 10K SFF			
600GB 12G 10K SFF			
450GB 6G 10K SFF			
300GB 12G 10K SFF			
300GB 12G 15K SFF			
450GB 12G 15K SFF			
600GB 12G 15K SFF			
146GB 6G 15K SFF			

6G SAS Hot Plug Enterprise Performance Solid State Drives

NOTE: Hard drives have either a one year or three year warranty; refer to specific hard drive QuickSpecs for details.

	Quantity Supported	Position Supported	Controller
200GB/400GB/800GB 12G SLC SFF	2	1-2	HP Smart Array P410i Controller



QuickSpecs

HP Integrity BL870c i2 Server Blade

Power Specifications


NOTE: The HP Power Advisor is a tool provided by Hewlett-Packard to assist in the estimation of power consumption and proper selection of components including power supplies at a system, rack, and multi-rack level. A variety of additional features are also provided including a condensed bill of materials, a cost of owner ship calculator, and a power report. For additional information please visit: HP Power Advisor: http://h18004.www1.hp.com/products/solutions/power/index.html



QuickSpecs

Technical Specifications

System Unit	Dimensions	Height	14.42 in (36.63 cm)
		Depth	20.05 in (50.93 cm)
		Width	4.13 in (10.49 cm)
	Shipping Dimensions	Height	20.28 in (51.51 cm)
		Depth	26.57 in (67.49 cm)
		Width	11.42 in (29.00 cm)
	Weight	Maximum	53 lbs. (24.04 kg)
	Temperature Range*	Operating	10° to 35° C (50° to 95° F)
		Non-Operating	-40° to 60° C (-40° to 140° F)
		Storage	-20° to 60° C (-4° to 140° F)
		Maximum Wet Bulb Temperature	30° C (86° F)
	Relative Humidity**	Operating	15% to 80%
	Relative Humidity**Operating15% to 80%Shipping10% to 90%		
		Storage	10% to 90%
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 Kp KPa/4.4 psia. **Storage maximum humid	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a l	altitude derating of 1°C per 304.8 m (1.8°F per ect sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude
SAS RAID HP p410i	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage corre Disk Drive and Enclosure	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a l	ect sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa.
SAS RAID HP p410i Controller	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage corre Disk Drive and Enclosure Interface	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a esponds to a pressure min 3Gb SAS (Serial Attach	ect sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa.
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage corre Disk Drive and Enclosure Interface SAS Connectors	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r sponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x	ect sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. Med SCSI)
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 Kj KPa/4.4 psia. **Storage maximum humid maximum for storage corre Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a sponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr	ect sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. ned SCSI) e4 wide port connectors. rovides up to 4.2GB/s maximum bandwidth
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage corre Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r sponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi	act sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. and SCSI) at wide port connectors. rovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 Kj KPa/4.4 psia. **Storage maximum humid maximum for storage corre Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r esponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide	ect sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. ned SCSI) e4 wide port connectors. rovides up to 4.2GB/s maximum bandwidth
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage corre Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed Cache Memory	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r esponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide Not supported.	act sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. and SCSI) at wide port connectors. rovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth es 1200MB/s maximum bandwidth.
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage correct Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed Cache Memory Logical Drives Supported	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r esponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide Not supported. Up to 2 logical volume	act sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. and SCSI) at wide port connectors. rovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth es 1200MB/s maximum bandwidth.
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage corre Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed Cache Memory	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r esponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide Not supported.	act sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. and SCSI) at wide port connectors. rovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth es 1200MB/s maximum bandwidth.
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage correct Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed Cache Memory Logical Drives Supported Maximum Logical Drive	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r esponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide Not supported. Up to 2 logical volume Up to 64 logical	act sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. and SCSI) at wide port connectors. rovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth es 1200MB/s maximum bandwidth.
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage correct Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed Cache Memory Logical Drives Supported Maximum Logical Drive Capacity	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r sponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide Not supported. Up to 2 logical volume Up to 64 logical 64-bit, supporting gre	act sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. and SCSI) 44 wide port connectors. Tovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth es 1200MB/s maximum bandwidth. Setter than 4GB server memory space of 1 (mirroring), and 1+0 (Mirroring and striping) (not
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage correct Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed Cache Memory Logical Drives Supported Maximum Logical Drive Capacity Host Memory Addressing	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r esponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide Not supported. Up to 2 logical volume Up to 64 logical 64-bit, supporting gre RAID 0 (striping), RAID supported with BL8x0 Upgradeable Firmwar	act sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. and SCSI) 44 wide port connectors. Tovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth es 1200MB/s maximum bandwidth. Setter than 4GB server memory space of 1 (mirroring), and 1+0 (Mirroring and striping) (not
Controller Embedded Dual NC532i	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage correct Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed Cache Memory Logical Drives Supported Maximum Logical Drive Capacity Host Memory Addressing RAID Support	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r esponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide Not supported. Up to 2 logical volume Up to 64 logical 64-bit, supporting gre RAID 0 (striping), RAID supported with BL8x0 Upgradeable Firmwar Online Drive Flash req	ect sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. ned SCSI) 44 wide port connectors. rovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth es 1200MB/s maximum bandwidth. es 1200MB/s maximum bandwidth. es 1200MB/s maximum bandwidth. es eater than 4GB server memory space 0.1 (mirroring), and 1+0 (Mirroring and striping) (not ic i2 blades) e with Recovery ROM features uires 256MB, 512MB, or 1GB cache module
	1,000 ft) to 3048 m (10,000 3,048m (10,000 ft) or 70 K KPa/4.4 psia. **Storage maximum humid maximum for storage correct Disk Drive and Enclosure Interface SAS Connectors Cache Memory Speed Server Interface SAS Speed Cache Memory Logical Drives Supported Maximum Logical Drive Capacity Host Memory Addressing RAID Support Upgradeable Firmware	D ft) is applicable. No dire pa/10.1 psia. Upper non- lity of 90% is based on a r esponds to a pressure min 3Gb SAS (Serial Attach 4 internal (SFF8484) x DDR2-800 memory pr X1 5.0Gbps PCIe provi Fourx1 3G SAS provide Not supported. Up to 2 logical volume Up to 64 logical 64-bit, supporting gre RAID 0 (striping), RAID supported with BL8x0 Upgradeable Firmwar Online Drive Flash req	ect sunlight allowed. Upper operating limit is operating limit is 9,144 m (30,000 ft) or 30.3 maximum temperature of 45°C (113°F). Altitude nimum of 70 KPa. need SCSI) e4 wide port connectors. rovides up to 4.2GB/s maximum bandwidth des 1.0GB/s maximum bandwidth es 1200MB/s maximum bandwidth. es 1200MB/s maximum bandwidth. es eater than 4GB server memory space 0.1 (mirroring), and 1+0 (Mirroring and striping) (not ic i2 blades) e with Recovery ROM features uires 256MB, 512MB, or 1GB cache module x flow control, and 802.3ap 10Gb Base-KR





QuickSpecs

HP Integrity BL870c i2 Server Blade

Technical Specifications

	Network Transfer Rate (Theoretical Maximum Values)	1Dual 10Gb ports offer up to 40Gb/s bidirectional theoretical throughput	
Values) Environment-friendly End-of-life Management Products and Approach and Recycling		Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.	



QuickSpecs

HP Integrity BL870c i2 Server Blade

Summary of Changes

Date	Version History	Action	Description of Change:
01-Jun-2015	From Version 21 to 22	Changed	Information updated in storage section.
		Added	Skus added in Configuration Information - Factory
			Integrated Models and Core options
			• 802576-B21
			• 802580-B21
			• 802584-B21
		Removed	Skus removed in Configuration Information - Factory
			Integrated Models and core options
			• 632492-B21
20 May 2015		Changed	632494-B21
30-Mar-2015	From Version 20 to 21	Changed	Configuration Information - Factory integrated models and
		Added	Storage sections were updated Skus Added:
		Audeu	
			• 785079-B21
			 785075-B21 785073-B21
			707000 804
			 785101-B21 785103-B21
			• 785071-B21
		Removed	Skus deleted:
		Kennoved	• 718160-B21
			• 619291-B21
			• 581286-B21
			• 627117-B21
			• 507127-B21
01-Dec-2014	From Version 19 to 20	Changed	Standard Features, Support Services, Configuration
		j	Information - Factory Integrated Models, Core Options and
			Memory sections were updated
		Added	Technology Services for Integrity Servers and Protect your
			business beyond warranty with HP Care Pack Services
			sections were added to Support Services
		Removed	Obsolete skus deleted:
			• 507125-B21
			• 512545-B21
			 580151-B21 508226-B21
			• 411243-B21
			• BS580A
			• AQ697A
18-Apr-2014	From Version 18 to 19	Changed	Service and Support and Basic Care were revised.
10-Dec-2013	From Version 17 to 18	Added	HP 1.2TB 6G SAS 10K rpm SFF Dual Port Enterprise 3yr
		nuucu	Warranty Hard Drive was added to Hard Drives.
24-Sep-2012	From Version 16 to 17	Changed	Changes made in Standard Features section.
07-May-2012	From Version 15 to 16	Changed	Memory was revised throughout.
10-Feb-2012	From Version 14 to 15	Changed	Changes made to the USB Options sections. And the Support
			Services section was added.
14-Nov-2011	From Version 13 to 14	Changed	FlexFabric Support, Smart Array Controller Support,
		-	Supported Software Options, HP FlexFabric Mezzanine



QuickSpecs

HP Integrity BL870c i2 Server Blade

Summary of Changes

			Options and Hard Drives were revised.
30-Sep-2011	From Version 12 to 13	Changed	Changes made within the Overview, Standard Features,
•		5	Configuration Information and Options sections.
02-Aug-2011	From Version 11 to 12	Changed	Hard Drives Descriptions changes made.
20-Jun-2011	From Version 10 to 11	Changed	6G SAS Hot Plug Enterprise Performance Solid State Drives were added to Hard Drives
			HP Ultrium Tape Drives removed from Additional Options
09-May-2011	From Version 9 to 10	Changed	Processor descriptions were revised
			Maximum internal storage was increased to 3.6TB
			HP 900GB 6G SAS 10K rpm SFF Enterprise Drive was added to Hard Drives
15-Apr-2011	From Version 8 to 9	Added	FlexFabric Support and InfiniBand Support were added to Standard Features
			HP BLc NC551m Dual Port FlexFabric 10Gb Converged Network Adapter was added to HP Ethernet Mezzanine Options
			HP c-Class Mezzanine Options was added to Step 3
			HP Ethernet Interconnects was added to Additional Options
18-Mar-2011	From Version 7 to 8	Changed	Models, Processors, Memory and Fibre Channel Mezzanine Options product descriptions were revised
			HP USB Options was added to Standard Features and Additional Options
15-Nov-2010	From Version 6 to 7	Changed	Maximum memory was increased to 768GB, Smart Array Controllers and HP Ultrium Tape Blade product descriptions were modified, Intel Itanium Processor 9310 was added, HP BL8x0c i2 32GB (2x16) PC3-10600R-9 Kit was added to Memory, HP Integrity Upgrade Kits was added to Additional Options and SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives were removed from Hard Drives.
08-0ct-2010	From Version 5 to 6	Changed	Hot Plug SAS Maximum Internal Storage was increased to 2.4TB, 8Gb Fibre Channel Host Bus Adapter product descriptions were revised in Fibre Channel on the HP Integrity BL870c i2 server blade, Smart Array Controller Support was revised and HP 450GB and 600GB 6G SAS 10K rpm SFF Dual Port Enterprise Hard Drives were added to Hard Drives.
20-Aug-2010	From Version 4 to 5	Changed	Note was added to HP Onboard Administrator in Glossary of Integrity Server Blades Management Software Product Description and HP BladeSystem c3000 tower enclosure was removed from At A Glance Enclosures.
09-Aug-2010	From Version 3 to 4	Changed	Revised the images to reflect the correct callout line style.
19-Jul-2010	From Version 2 to 3	Changed	Maximum memory was increased to 384 GB Hard Drive and Ethernet Mezzanine Options descriptions were revised Power Specifications note was completely revised What's New was added to Overview OpenVMS 8.4 and Microsoft Windows Server 2008 for



QuickSpecs

HP Integrity BL870c i2 Server Blade

Summary of Changes

			Itanium-based systems were added to OS Systems HP BL8x0c i2 16GB Memory was added HP Integrity BL870c i2 Bundles were added to Core Options
07-May-2010	From Version 1 to 2	Changed	Changes made within the Standard Features, Models and Technical Specifications sections.

© Copyright 2015 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

